

Northeast
Metropolitan
Regional
Vocational High
School

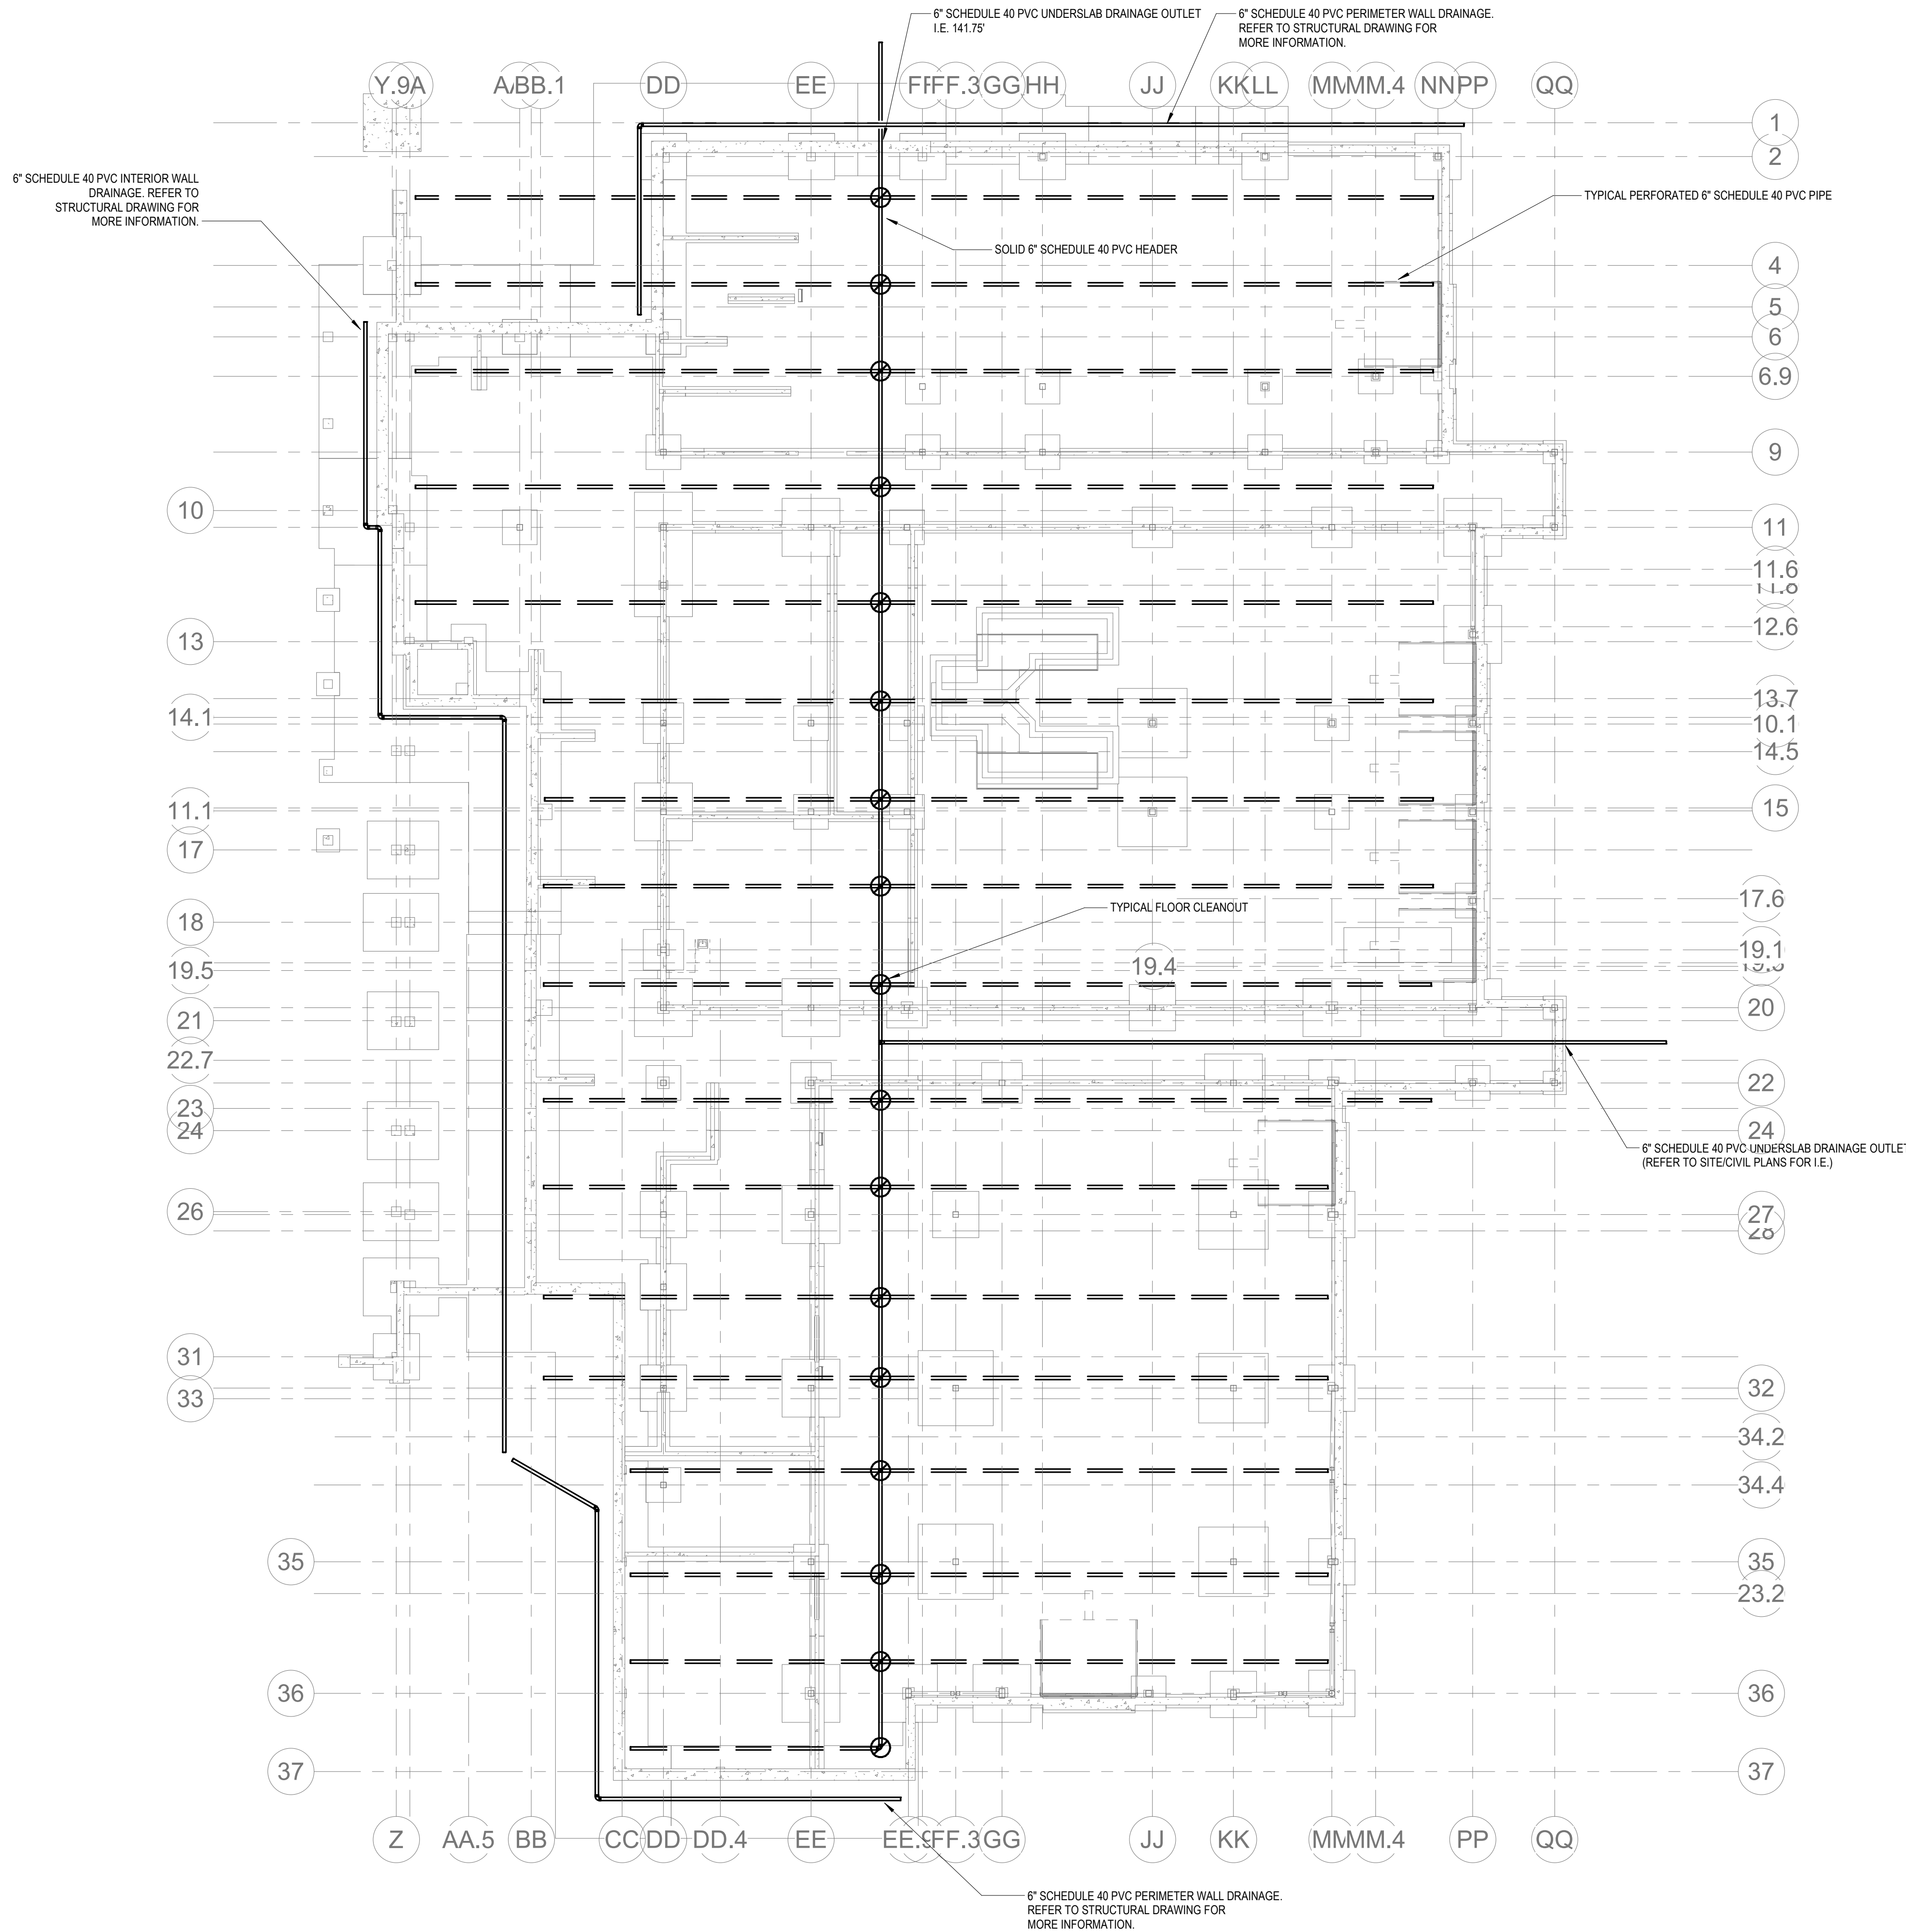
Wakefield, MA 01880

SCOPE NOTES:

UNDERSLAB DRAINAGE SHALL CONSIST OF:

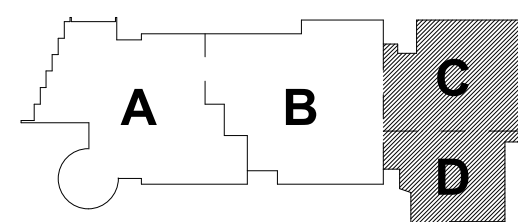
1. A MINIMUM OF 12 INCHES OF 3/4 INCH CRUSHED STONE PLACED BELOW THE SLAB.
2. 6" PERFORATED SCHEDULE 40 PVC PIPES INSTALLED WITH THEIR INVERTS AT LEAST 24 INCHES BELOW THE BOTTOM OF THE SLAB. THE PIPES SHALL BE INSTALLED IN TRENCHES PLACED AT 10-15 FEET APART. THE TRENCHES SHALL BE 18 INCHES WIDE AND 12 INCHES DEEP BELOW THE BOTTOM OF THE 12 INCHES OF CRUSHED STONE) TO ALLOW PLACING CRUSHED STONE AROUND THE PVC PIPE.
3. THE PERFORATED PVC PIPES SHOULD CONNECT TO A 6 INCH SOLID PVC HEADER PIPE THAT COLLECTS AND CHANNELS THE COLLECTED WATER OUT OF THE BUILDING.
4. CLEAN OUTS SHALL BE INCLUDED AT THE END OF THE PERFORATED PIPES.
5. UNDER SLAB DRAINAGE PIPES SHALL CONSIST OF 6 INCH SCHEDULE 40 PVC.
6. THE LAYOUT OF THE UNDER SLAB DRAINAGE SYSTEM SHOULD NOT BE CONNECTED TO OTHER DRAINAGE PIPES, PERIMETER DRAINS, OR ROOF LEADERS.
7. OUTLET PIPES SHALL BE SLOPED AWAY FROM THE BUILDING AS TO PREVENT BACKFLOW INTO THE BUILDING.
8. THE UNDERSLAB DRAINAGE SYSTEM SHOWN IN THESE DRAWINGS IS TO SHOW THE GENERAL LAYOUT OF THE SYSTEM. THE CONTRACTOR SHALL PREPARE AND SUBMIT SHOP DRAWINGS SHOWING UNDER SLAB DRAINAGE SYSTEM AS RECONCILED WITH FOUNDATIONS AND OTHER UTILITIES. THE SYSTEM SHALL NOT BE INSTALLED UNTIL THE SHOP DRAWINGS ARE REVIEWED AND APPROVED.
9. REFER TO STRUCTURAL DRAWINGS FOR DETAILS OF PERIMETER AND INTERIOR WALL DRAINS.
10. LOCATION OF UNDER SLAB DRAINAGE PIPES MAY BE ADJUSTED IN THE FIELD AS NEEDED. IF ADJUSTMENT IS MORE THAN 1 FEET, THE GEOTECHNICAL ENGINEER MUST BE NOTIFIED TO REVIEW NEW LOCATION.

FINISHED FLOOR ELEVATION AT LOWER LEVEL IS 143.97'

1
GT-01
GEOTECHNICAL PLAN - EAST
1/16" = 1'-0"


DRAWING LIST - GEOTECHNICAL

DRAWING NUMBER	DRAWING TITLE	06/23/2022 - DESIGN DEVELOPMENT - COST ESTIMATE SET	08/04/2022 - MSBA DESIGN DEVELOPMENT	11/12/2022 - 90% CONSTRUCTION DOCUMENTS COST ESTIMATING SET	12/06/2022 - EARLY SITE PREPARATION CONTRACT DOCUMENTS	01/13/2023 - MSBA 90% CD SUBMISSION	03/31/23 90% CD COST ESTIMATE SET		
GT-01	GEOTECHNICAL PLAN EAST	•	•	•	•	•			
GT-02	GEOTECHNICAL PLAN WEST	•	•	•	•	•			


MSBA 90% CD
Construction Document
Submittal
May 12th, 2023

KEY PLAN

PROJECT NORTH



MAGNETIC NORTH

GEOTECHNICAL
PLAN EAST

Scale: 1/16" = 1'-0"

Job No.: 20202

Drawn By: DRA

Date: March 31st, 2023

GT-0-1

Drummeys Rosane Anderson, Inc.


225 Oakland Road	260 Charles Street
Studio 205	Studio 300
South Windsor, CT	Waltham, MA
06074	02453

Planning | Architecture | Interior Design

Tel: 860.644.8300
www.draas.com

Wakefield, MA 01880

FINISHED FLOOR ELEVATION AT FIRST FLOOR IS 163.50'



GT-0-2